



1 Install Lock Body

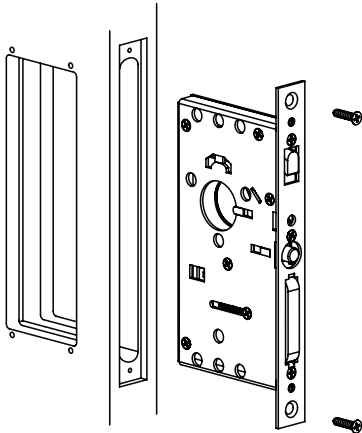

See template for door prep specifications


2 Install Drive Bar Cylinder

Use Cylinder Key to thread Drive Bar Cylinder clockwise on interior side of door.

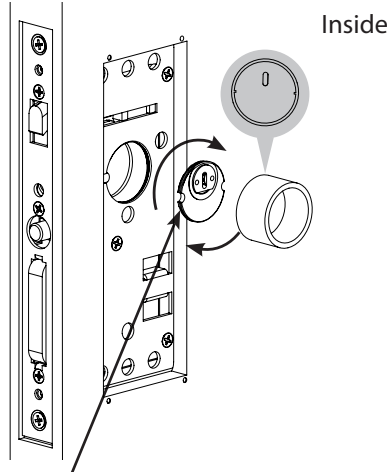


Note: Notch on cylinder must be in the 9 o'clock position when fully screwed into lock body.

3 Mount Outside Plate

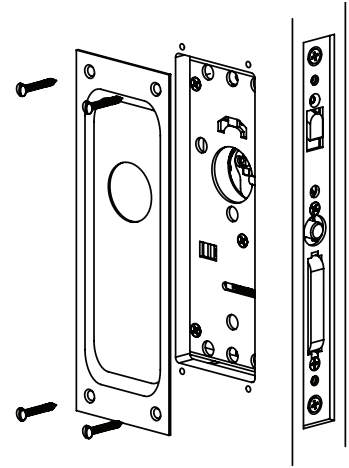


4 Thread Key Cylinder

Install Key Cylinder by threading it clockwise onto lock body plate

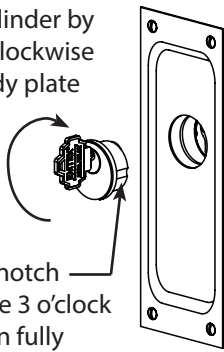


Key Cylinder notch must be at the 3 o'clock position when fully screwed in lock body.

5 Tighten Drive Bar Cylinder

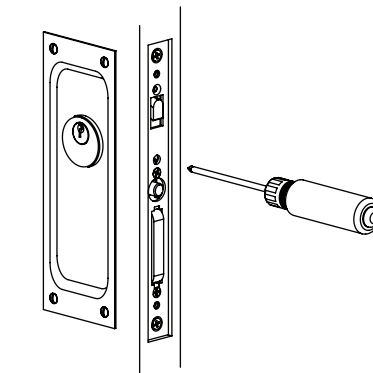


Tighten locking screw to engage notch on cylinder


6 Mount Inside Plate

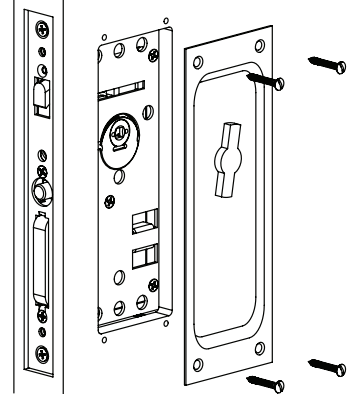

7 Install Trim Plate

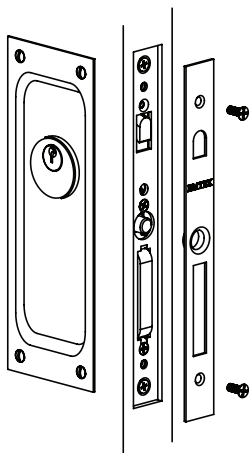


8 Install Door Jamb

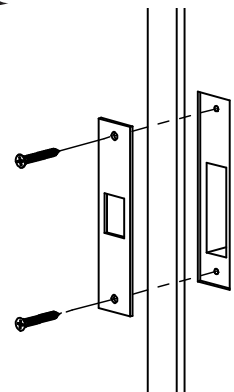

Drill two 7/64" pilot holes

See template for door jamb prep specifications


1 Install Lock Body

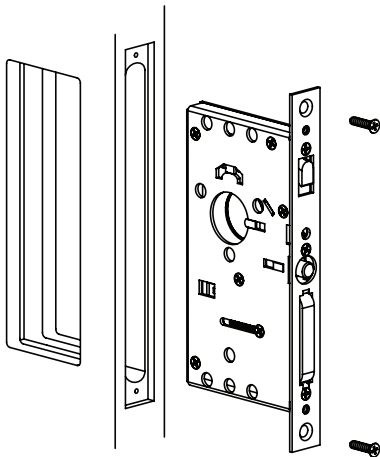

See template for door prep specifications

2 Install Drive Bar Cylinder


Use Cylinder Key to thread Drive Bar Cylinder clockwise on interior side of door.

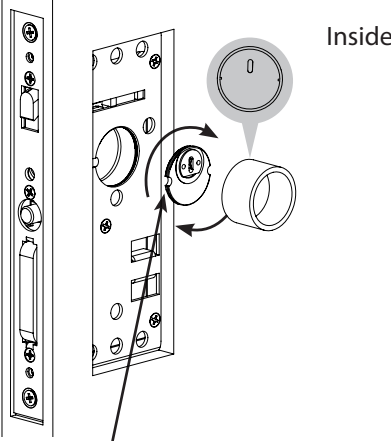

Note: Notch on cylinder must be in the 9 o'clock position when fully screwed into lock body.


3 Mount Outside Plate and Thread Key Cylinder

Install Key Cylinder by threading it clockwise onto lock body plate

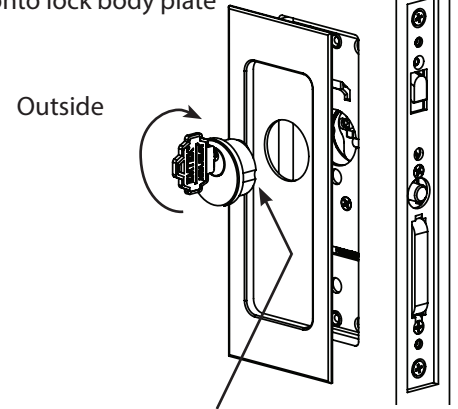


Key Cylinder notch must be at the 3 o'clock position when fully screwed in lock body.

4 Tighten Drive Bar Cylinder

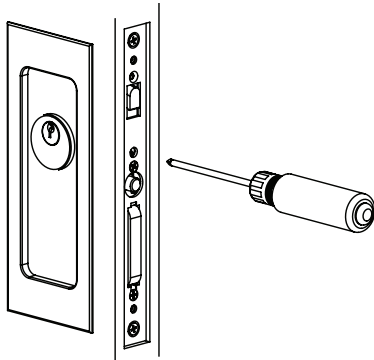


Tighten locking screw to engage notch on cylinder


5 Mount Inside Plate

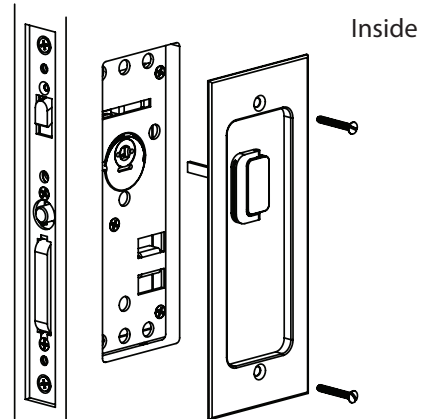

6 Install Trim Plate

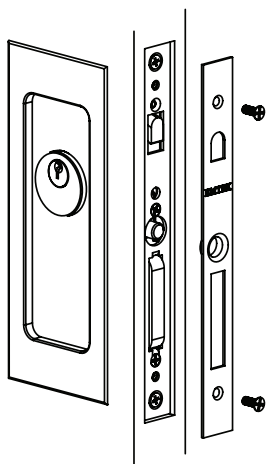

7 Install Door Jamb

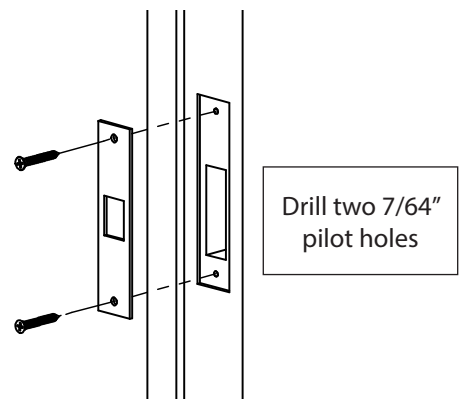

Drill two 7/64" pilot holes

See template for door jamb prep specifications