



1 Install Lock Body

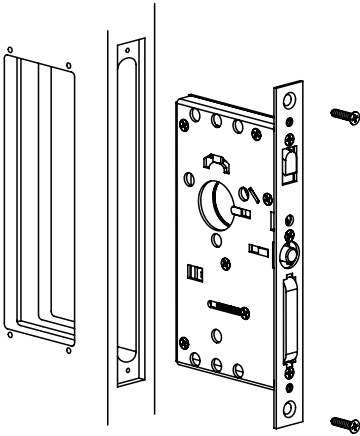


See template for door prep specifications

2 Install Drive Bar Cylinder

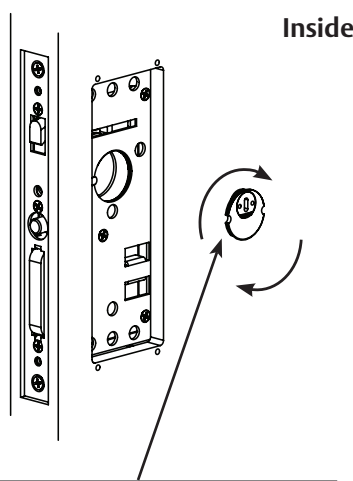


Note: Notch on cylinder must be in the 9 o'clock position when fully screwed into lock body.

3 Tighten Drive Bar Cylinder

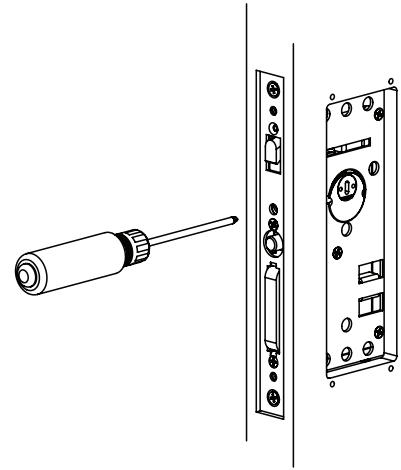


Tighten locking screw to engage notch on cylinder

4 Mount Inside/Outside Plates

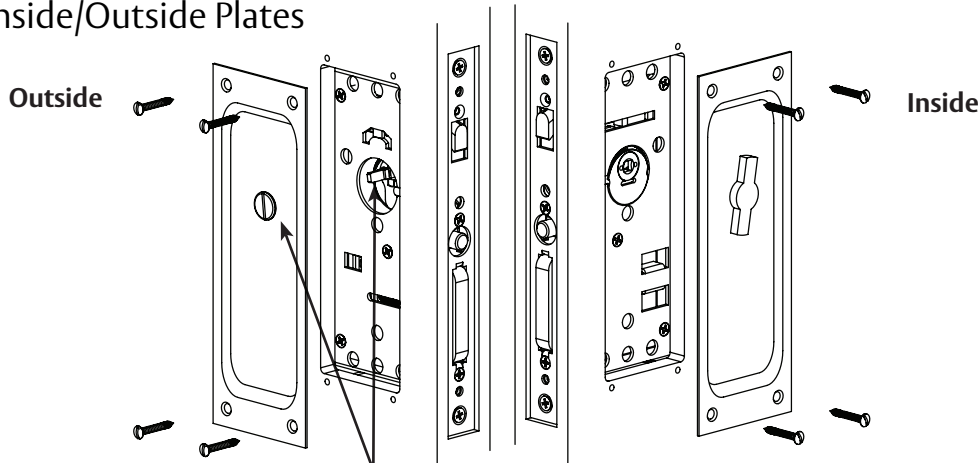


Align Passage/Privacy Button with Thumb-Turn spindle and secure trim plates to door.

5 Install Trim Plate

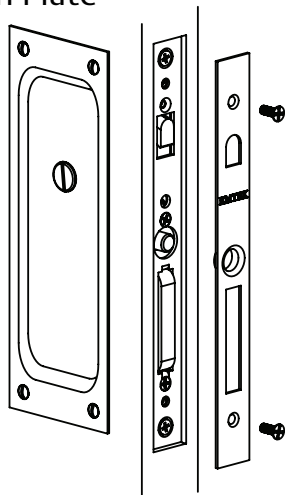


6 Install Door Jamb

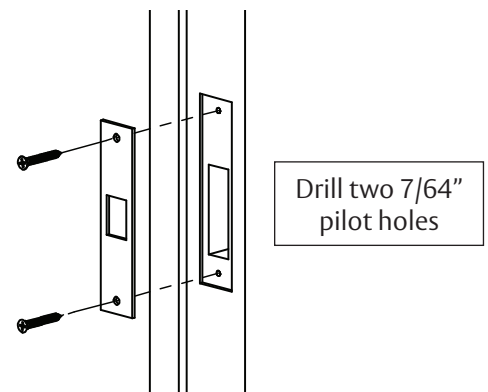


See template for door jamb prep specifications

1 Install Lock Body

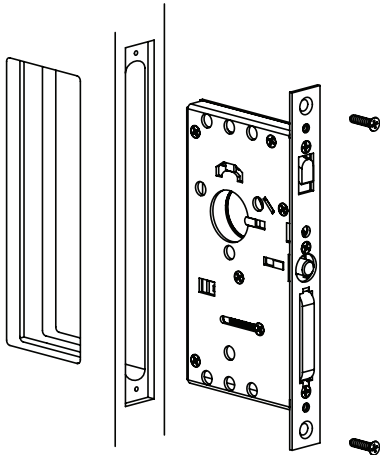


See template for door prep specifications

2 Install Drive Bar Cylinder

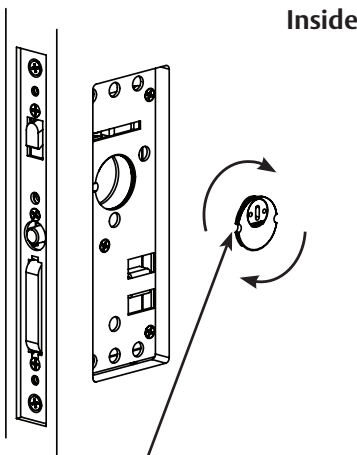


Note: Notch on cylinder must be in the 9 o' clock position when fully screwed into lock body.

3 Tighten Drive Bar Cylinder

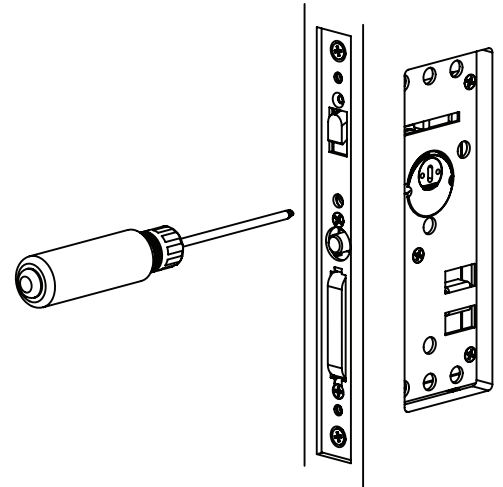


Tighten locking screw to engage notch on cylinder

4 Mount Inside/Outside Plates

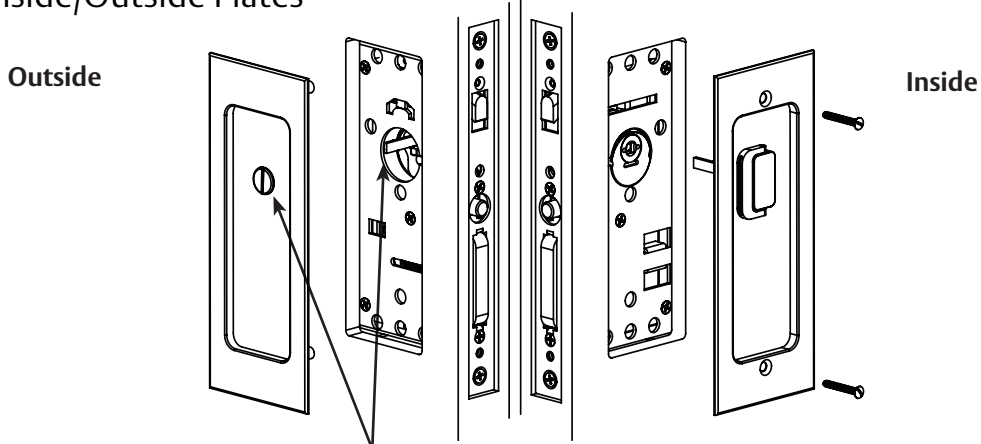


Align Passage/Privacy Button with Thumb-Turn spindle and secure trim plates to door.

5 Install Trim Plate

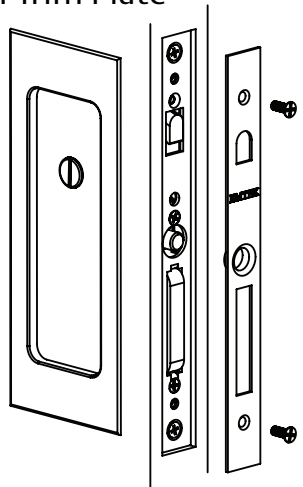

6 Install Door Jamb

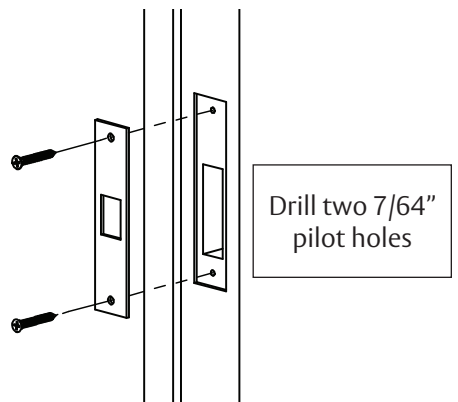

See template for door jamb prep specifications