



Door Manufacturers listed under each configuration are for reference only and are subject to change. Some retrofitting may be necessary. Please carefully measure and identify your hardware using the diagrams and steps listed on Emtek Multi Point Price Book pages 3, 4 and 5.

G-U® is a registered trademark of G-U Hardware, Inc., Paddock™ is a registered trademark of Yale® UK. Pella® is a registered trademark of Pella Corporation. Sierra Pacific Windows® is a registered trademark of Sierra Pacific Industries. Superior® is a registered trademark of Superior Engineered Products Corporation. Willmar® is a registered trademark of JELD-WEN of Canada Ltd. Andersen® is a registered trademark of Andersen Corporation. Trillanium® is a registered trademark of Endura Products, Inc., Eagle® is a registered trademark of Eagle Window and Door, Inc., BiltBest® is a registered trademark of BiltBest Windows and Patio Doors. Ashland® is a registered trademark of Ashland Products, Inc., Caradco®, JELD-WEN, Norco®, and Pozzi® are registered trademarks of JELD-WEN Inc. Oregon, USA. Integrity® and Marvin® are registered trademarks of Marvin Windows and Doors. Milgard® is a registered trademark of Milgard Windows, Inc., Therma-Tru® is a registered trademark of Therma-Tru Doors®. HOPPE® is a registered trademark of HOPPE North America, Inc., Hurd® is a registered trademark of Hurd Millwork Company. Kolbe & Kolbe® is a registered trademark of Kolbe & Kolbe Millwork Company, Inc., Lincoln® is a registered trademark of Lincoln Wood Products, Inc., Loewen® is a registered trademark of Loewen Windows. PGT® is a registered trademark of PGT Industries. Peachtree® and Vetter® are registered trademarks of The Peachtree Companies, Inc., Semco® is a registered trademark of Semling-Menke Co. Inc., Weathershield® is a registered trademark of Weathershield Mfg. Inc., KML by Andersen® is a registered trademark of KML by Andersen. Atrium® is a registered trademark of Atrium. KFV® is a registered trademark of KFV. Simpson® is a registered trademark of Simpson. Signature® is a registered trademark of Signature. Crestline® is a registered trademark of Crestline. Windsor® is a registered trademark of Windsor. Neuma Doors® is a registered trademark of Nan Ya Plastics Corporation. Oknoplast® is a registered trademark of Oknoplast. With the exception of Paddock™, none of the aforementioned companies are affiliated with Emtek Products, Inc.

DOOR CONFIGURATION #1

Specification Sheet for Components and Door Thickness

Door Configuration # 1 American Cylinder Below Handle 3 5/8" Center-to-Center

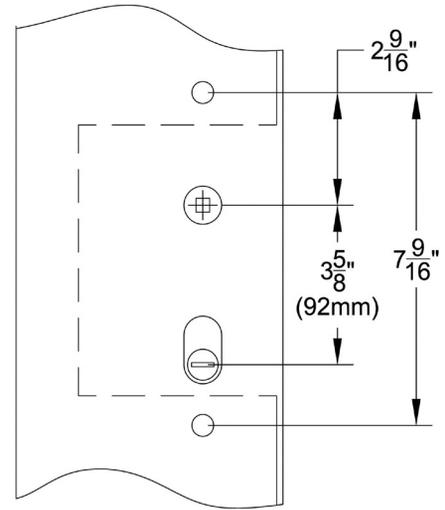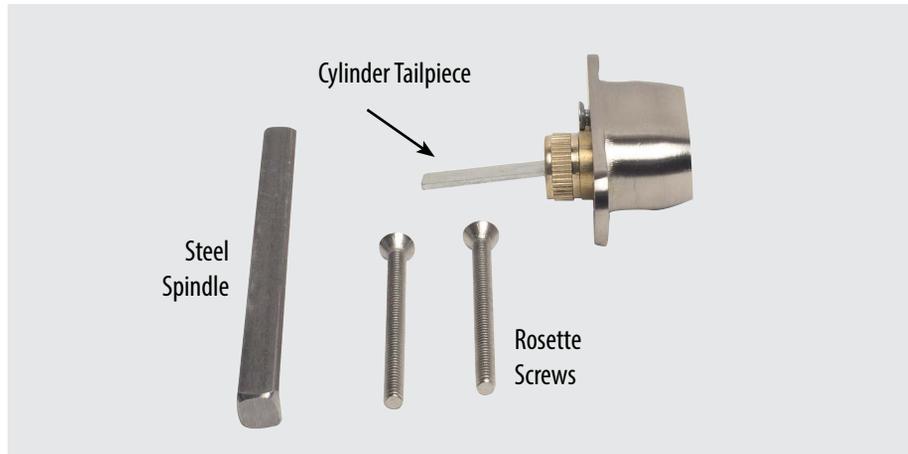

Keyed Plates with American Cylinder Includes non-keyed thumbturn inside

Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2"	Extended Door Thickness: Over 2" to 2 3/4"	Extended Door Thickness: Over 2 3/4" to 3 1/4"
<ul style="list-style-type: none"> • Single cylinder tailpiece • 3 3/4" Steel spindle • 1 1/2" Rosette screws 	<ul style="list-style-type: none"> • Long single cylinder tailpiece • 3 3/4" Steel spindle • 2" Rosette screws 	<ul style="list-style-type: none"> • Long single cylinder tailpiece for 2 1/8" - 2 1/2" thick door • Extra long single cylinder tailpiece for 2 3/8" - 2 3/4" thick door • 4 1/2" Steel spindle • 2" Rosette screws for 2 1/8" - 2 1/4" thick door • 2 1/2" Rosette screws for 2 3/8" - 2 3/4" thick door 	<ul style="list-style-type: none"> • Extra long single cylinder tailpiece • 5" Steel spindle • 3" Rosette screws

Non-Keyed Plates Includes non-keyed passage, fixed handle out/operating handle in, and dummy (uses screws only)


Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2"	Extended Door Thickness: Over 2" to 2 3/4"	Extended Door Thickness: Over 2 3/4" to 3 1/4"
<ul style="list-style-type: none"> • Thumbturn tailpiece • 3 3/4" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 1 1/2" Rosette screws 	<ul style="list-style-type: none"> • Thumbturn tailpiece • 3 3/4" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 2" Rosette screws 	<ul style="list-style-type: none"> • Long Thumbturn tailpiece for 2 1/8" - 2 1/2" thick door • Extra Long thumbturn tailpiece for 2 3/8" - 2 3/4" thick door • 4 1/2" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 2" Rosette screws for 2 1/8" - 2 1/4" thick door • 2 1/2" Rosette screws for 2 3/8" - 2 3/4" thick door 	<ul style="list-style-type: none"> • Extra long thumbturn tailpiece • 5" Steel spindle • 2 1/2" Half spindle for fixed handle out/operating handle in • 3" Rosette screws

Charge for Re-Keying - \$3 (NET) per cylinder


- Keying to Code
 - Order by indicating "**Key Code XXXXX**" next to applicable locks
- Keying Alike
 - Order by indicating "**Keyed Alike**" next to applicable locks if only one keyed alike group is wanted
 - If ordering multiple groups (houses) indicate "**Keyed Alike House #_**" next to applicable locks

Charge for Construction Keying - \$4 (NET) per cylinder

- Locks that are both construction keyed and keyed alike in a house group will be charged a total of **\$7 (NET) per cylinder**
- Lost ball system
- Last four pin locations drilled for lost ball application
- Master key pins used for code variability
- Construction keys and owner keys sent separately
- Order by indicating "**Construction Keyed, House #_**" next to applicable locks



Construction devices used on one or more of last four positions





Dimples drilled in plug in this position

Set includes plates, handles and cylinders (where applicable). Multi Point lock mechanism is not included.

Atrium®, G-U®, KML by Andersen®, Andersen®, Marvin Integrity®, Paddock Lockmaster™, Superior®

Keyed with American Cylinder (for Active Door, Schlage® Keyway Standard, Weiser® Keyway Optional, Rekeyable)	
<p>Product Codes 1111, 1131, 1151, 1171, 11A1</p>	<p>Product Codes 1121, 1141, 1161, 1181, 11B1</p>
Non-Keyed, Passage (for Semi-Active Door)	
<p>Product Codes 1112, 1132, 1152, 1172, 11A2</p>	<p>Product Codes 1122, 1142, 1162, 1182, 11B2</p>
Non-Keyed, American Style Thumbturn Inside (for Active Door)	
<p>Product Codes 1113, 1133, 1153, 1173, 11A3</p>	<p>Product Codes 1123, 1143, 1163, 1183, 11B3</p>
Non-Keyed, Fixed Handle Outside, Operating Handle Inside (for Semi-Active Door)	
<p>Plates, Product Codes 1114, 1134, 1154, 1174, 11A4</p>	<p>Product Codes 1124, 1144, 1164, 1184, 11B4</p>
Dummy Pair (for Non-Active Door)	
<p>Plates, Product Codes 1115, 1135, 1155, 1175, 11A5</p>	<p>Product Codes 1125, 1145, 1165, 1185, 11B5</p>

Door Configuration #2 American Cylinder Above Handle 3 5/8" Center-to-Center

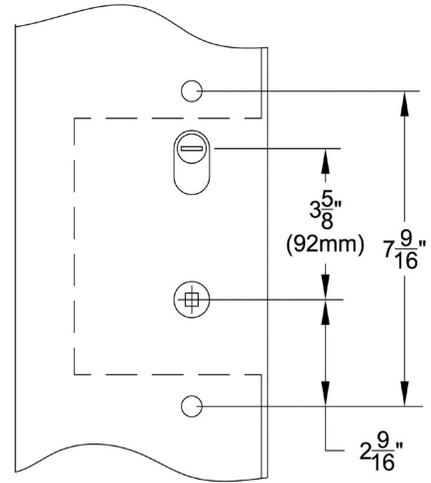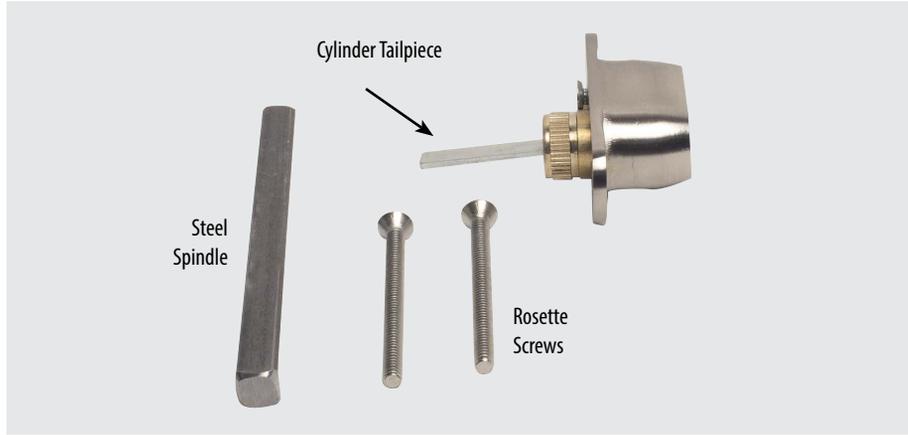

Keyed Plates with American Cylinder Includes non-keyed thumbturn inside

Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2"	Extended Door Thickness: Over 2" to 2 3/4"	Extended Door Thickness: Over 2 3/4" to 3 1/4"
<ul style="list-style-type: none"> • Single cylinder tailpiece • 3 3/4" Steel spindle • 1 1/2" Rosette screws 	<ul style="list-style-type: none"> • Long single cylinder tailpiece • 3 3/4" Steel spindle • 2" Rosette screws 	<ul style="list-style-type: none"> • Long single cylinder tailpiece for 2 1/8" - 2 1/2" thick door • Extra long single cylinder tailpiece for 2 3/8" - 2 3/4" thick door • 4 1/2" Steel spindle • 2" Rosette screws for 2 1/8" - 2 1/4" thick door • 2 1/2" Rosette screws for 2 3/8" - 2 3/4" thick door 	<ul style="list-style-type: none"> • Extra long single cylinder tailpiece • 5" Steel spindle • 3" Rosette screws

Non-Keyed Plates Includes non-keyed passage, fixed handle out/operating handle in, and dummy (uses screws only)


Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2"	Extended Door Thickness: Over 2" to 2 3/4"	Extended Door Thickness: Over 2 3/4" to 3 1/4"
<ul style="list-style-type: none"> • Thumbturn tailpiece • 3 3/4" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 1 1/2" Rosette screws 	<ul style="list-style-type: none"> • Thumbturn tailpiece • 3 3/4" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 2" Rosette screws 	<ul style="list-style-type: none"> • Long Thumbturn tailpiece for 2 1/8" - 2 1/2" thick door • Extra long thumbturn tailpiece for 2 3/8" - 2 3/4" thick door • 4 1/2" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 2" Rosette screws for 2 1/8" - 2 1/4" thick door • 2 1/2" Rosette screws for 2 3/8" - 2 3/4" thick door 	<ul style="list-style-type: none"> • Extra long thumbturn tailpiece • 5" Steel spindle • 2 1/2" Half spindle for fixed handle out/operating handle in • 3" Rosette screws

Charge for Re-Keying - \$3 (NET) per cylinder


- Keying to Code
 - Order by indicating "Key Code XXXXX" next to applicable locks
- Keying Alike
 - Order by indicating "Keyed Alike" next to applicable locks if only one keyed alike group is wanted
 - If ordering multiple groups (houses) indicate "Keyed Alike House #_" next to applicable locks

Charge for Construction Keying - \$4 (NET) per cylinder

- Locks that are both construction keyed and keyed alike in a house group will be charged a total of \$7 (NET) per cylinder
- Lost ball system
- Last four pin locations drilled for lost ball application
- Master key pins used for code variability
- Construction keys and owner keys sent separately
- Order by indicating "Construction Keyed, House #_" next to applicable locks



Construction devices used on one or more of last four positions





Dimples drilled in plug in this position

Set includes plates, handles and cylinders (where applicable). Multi Point lock mechanism is not included.

BiltBest®, G-U®, Hurd® (Energy Saver), Andersen®

Keyed with American Cylinder (for Active Door, Schlage® Keyway Standard, Weiser® Keyway Optional, Rekeyable)	
Product Codes 1211, 1231, 1251, 1271, 12A1 	Product Codes 1221, 1241, 1261, 1281, 12B1
Non-Keyed, Passage (for Semi-Active Door)	
Product Codes 1212, 1232, 1252, 1272, 12A2 	Product Codes 1222, 1242, 1262, 1282, 12B2
Non-Keyed, American Style Thumbturn Inside (for Active Door)	
Product Codes 1213, 1233, 1253, 1273, 12A3 	Product Codes 1223, 1243, 1263, 1283, 12B3
Non-Keyed, Fixed Handle Outside, Operating Handle Inside (for Semi-Active Door)	
Product Codes 1214, 1234, 1254, 1274, 12A4 Fixed 	Product Codes 1224, 1244, 1264, 1284, 12B4 Fixed
Dummy Pair (for Non-Active Door)	
Product Codes 1215, 1235, 1255, 1275, 12A5 Fixed 	Product Codes 1225, 1245, 1265, 1285, 12B5 Fixed

Door Configuration #3 American Cylinder Above Handle 4 1/8" Center-to-Center

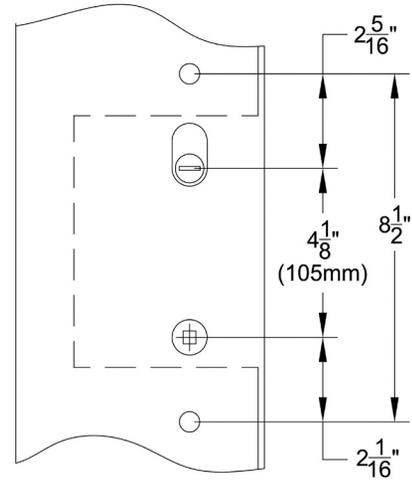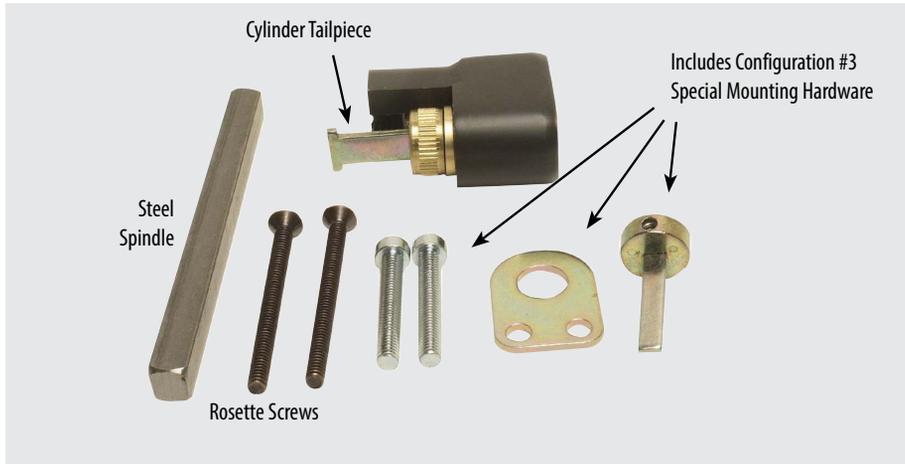

Keyed Plates with American Cylinder Includes non-keyed thumbturn inside

Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2"	Extended Door Thickness: Over 2" to 2 3/4"	Extended Door Thickness: Over 2 3/4" to 3 1/4"
<ul style="list-style-type: none"> • Configuration 3 cylinder tailpiece • 3 3/4" Steel spindle • 1 1/2" Rosette screws 	<ul style="list-style-type: none"> • Configuration 3 cylinder tailpiece • 3 3/4" Steel spindle • 2" Rosette screws 	<ul style="list-style-type: none"> • Configuration 3 cylinder tailpiece • 4 1/2" Steel spindle • 2" Rosette screws for 2 1/8" - 2 1/4" thick door • 2 1/2" Rosette screws for 2 3/8" - 2 3/4" thick door 	<ul style="list-style-type: none"> • Configuration 3 cylinder tailpiece • 5" Steel spindle • 3" Rosette screws

Non-Keyed Plates Includes non-keyed passage, fixed handle out/operating handle in, and dummy (uses screws only)


Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2"	Extended Door Thickness: Over 2" to 2 3/4"	Extended Door Thickness: Over 2 3/4" to 3 1/4"
<ul style="list-style-type: none"> • Configuration 3 thumbturn tailpiece • 3 3/4" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 1 1/2" Rosette screws 	<ul style="list-style-type: none"> • Configuration 3 thumbturn tailpiece • 3 3/4" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 2" Rosette screws 	<ul style="list-style-type: none"> • Configuration 3 thumbturn tailpiece • 4 1/2" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 2" Rosette screws for 2 1/8" - 2 1/4" thick door • 2 1/2" Rosette screws for 2 3/8" - 2 3/4" thick door 	<ul style="list-style-type: none"> • Configuration 3 thumbturn tailpiece • 5" Steel spindle • 2 1/2" Half spindle for fixed handle out/operating handle in • 3" Rosette screws

Charge for Re-Keying - \$3 (NET) per cylinder


- Keying to Code
 - Order by indicating "**Key Code XXXXX**" next to applicable locks
- Keying Alike
 - Order by indicating "**Keyed Alike**" next to applicable locks if only one keyed alike group is wanted
 - If ordering multiple groups (houses) indicate "**Keyed Alike House #_**" next to applicable locks

Charge for Construction Keying - \$4 (NET) per cylinder

- Locks that are both construction keyed and keyed alike in a house group will be charged a total of **\$7 (NET) per cylinder**
- Lost ball system
- Last four pin locations drilled for lost ball application
- Master key pins used for code variability
- Construction keys and owner keys sent separately
- Order by indicating "**Construction Keyed, House #_**" next to applicable locks



Construction devices used on one or more of last four positions



Dimples drilled in plug in this position

Set includes plates, handles and cylinders (where applicable). Multi Point lock mechanism is not included.
Andersen®

Keyed with American Cylinder (for Active Door, Schlage® Keyway Standard, Weiser® Keyway Optional, Rekeyable)

Product Codes **1311, 1331, 1351, 1371, 13A1**

Product Codes **1321, 1341, 1361, 1381, 13B1**

Non-Keyed, Passage (for Semi-Active Door)

Product Codes **1312, 1332, 1352, 1372, 13A2**

Product Codes **1322, 1342, 1362, 1382, 13B2**

Non-Keyed, American Style Thumbturn Inside (for Active Door)

Product Codes **1313, 1333, 1353, 1373, 13A3**

Product Codes **1323, 1343, 1363, 1383, 13B3**

Non-Keyed, Fixed Handle Outside, Operating Handle Inside (for Semi-Active Door)

Product Codes **1314, 1334, 1354, 1374, 13A4**



Product Codes **1324, 1344, 1364, 1384, 13B4**

Dummy Pair (for Non-Active Door)

Product Codes **1315, 1335, 1355, 1375, 13A5**

Product Codes **1325, 1345, 1365, 1385, 13B5**

Door Configuration #4 American Cylinder Above Handle 3 5/8" Center-to-Center

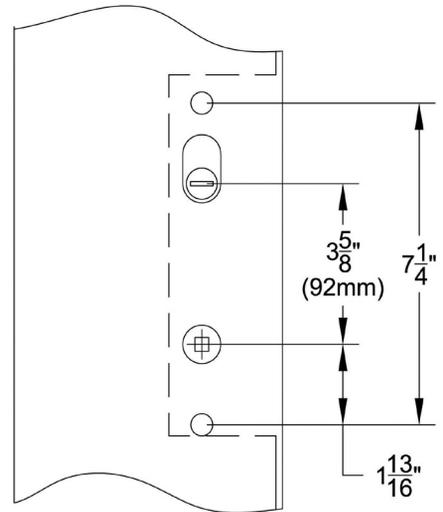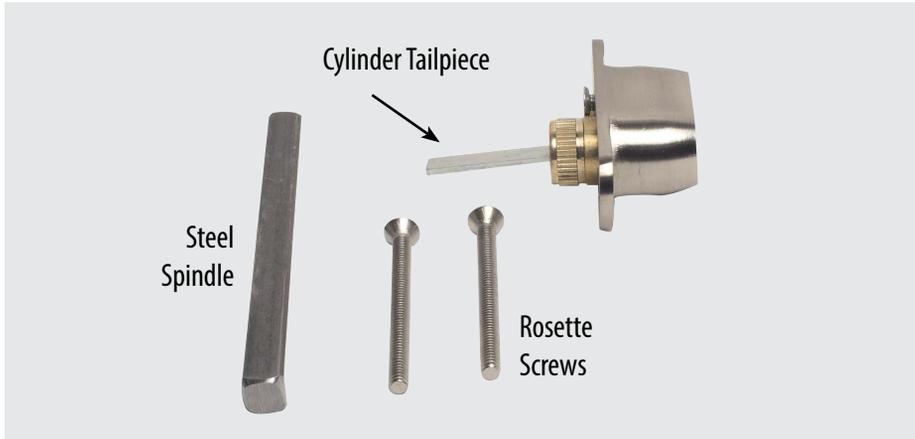

Keyed Plates with American Cylinder Includes non-keyed thumbturn inside

Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2"	Extended Door Thickness: Over 2" to 2 3/4"	Extended Door Thickness: Over 2 3/4" to 3 1/4"
<ul style="list-style-type: none"> • Single cylinder tailpiece • 3 3/4" Steel spindle • 2" Rosette screws 	<ul style="list-style-type: none"> • Long single cylinder tailpiece • 3 3/4" Steel spindle • 2" Rosette screws for 1 7/8" thick door • 2 1/2" Rosette screws for 2" thick door 	<ul style="list-style-type: none"> • Long single cylinder tailpiece for 2 1/8" - 2 1/2" thick door • Extra long single cylinder tailpiece for 2 3/8" - 2 3/4" thick door • 4 1/2" Steel spindle • 2 1/2" Rosette screws for 2 1/8" - 2 3/8" thick door • 3" Rosette screws for 2 1/2" - 2 3/4" thick door 	<ul style="list-style-type: none"> • Extra long single cylinder tailpiece • 5" Steel spindle • 3" Rosette screws for 2 7/8" thick door • 3 1/2" Rosette screws for 3" - 3 1/4" thick door

Non-Keyed Plates Includes non-keyed passage, fixed handle out/operating handle in, and dummy (uses screws only)


Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2"	Extended Door Thickness: Over 2" to 2 3/4"	Extended Door Thickness: Over 2 3/4" to 3 1/4"
<ul style="list-style-type: none"> • Thumbturn tailpiece • 3 3/4" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 2" Rosette screws 	<ul style="list-style-type: none"> • Thumbturn tailpiece • 3 3/4" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 2" Rosette screws for 1 7/8" thick door • 2 1/2" Rosette screws for 2" thick door 	<ul style="list-style-type: none"> • Long Thumbturn tailpiece for 2 1/8" - 2 1/2" thick door • Extra long thumbturn tailpiece for 2 5/8" - 2 3/4" thick door • 4 1/2" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 2 1/2" Rosette screws for 2 1/8" - 2 3/8" thick door • 3" Rosette screws for 2 1/2" - 2 3/4" thick door 	<ul style="list-style-type: none"> • Extra long thumbturn tailpiece • 5" Steel spindle • 2 1/2" Half spindle for fixed handle out/operating handle in • 3" Rosette screws for 2 7/8" thick door • 3 1/2" Rosette screws for 3" - 3 1/4" thick door

Charge for Re-Keying - \$3 (NET) per cylinder


- Keying to Code
 - Order by indicating "**Key Code XXXXX**" next to applicable locks
- Keying Alike
 - Order by indicating "**Keyed Alike**" next to applicable locks if only one keyed alike group is wanted
 - If ordering multiple groups (houses) indicate "**Keyed Alike House #_**" next to applicable locks

Charge for Construction Keying - \$4 (NET) per cylinder

- Locks that are both construction keyed and keyed alike in a house group will be charged a total of **\$7 (NET) per cylinder**
- Lost ball system
- Last four pin locations drilled for lost ball application
- Master key pins used for code variability
- Construction keys and owner keys sent separately
- Order by indicating "**Construction Keyed, House #_**" next to applicable locks



Construction devices used on one or more of last four positions



Dimples drilled in plug in this position

Set includes plates, handles and cylinders (where applicable). Multi Point lock mechanism is not included.
 Ashland®, G-U®, Caradco®, JELD-WEN®, Jeldwen® Custom Collection (formerly Pozzi®), Marvin®, PGT®, Premium Collection (formerly Norco®), Weathershield®

Keyed with American Cylinder (for Active Door, Schlage® Keyway Standard, Weiser® Keyway Optional, Rekeyable)

Product Codes **1411, 1431, 1451, 1471, 14A1**

Product Codes **1421, 1441, 1461, 1481, 14B1**

Non-Keyed, Passage (for Semi-Active Door)

Product Codes **1412, 1432, 1452, 1472, 14A2**

Product Codes **1422, 1442, 1462, 1482, 14B2**

Non-Keyed, American Style Thumbturn Inside (for Active Door)

Product Codes **1413, 1433, 1453, 1473, 14A3**

Product Codes **1423, 1443, 1463, 1483, 14B3**

Non-Keyed, Fixed Handle Outside, Operating Handle Inside (for Semi-Active Door)

Product Codes **1414, 1434, 1454, 1474, 14A4**

Product Codes **1424, 1444, 1464, 1484, 14B4**

Dummy Pair (for Non-Active Door)


Product Codes **1415, 1435, 1455, 1475, 14A5**

Product Codes **1425, 1445, 1465, 1485, 14B5**

Door Configuration #5 Euro Profile Cylinder Below Handle 3 5/8" Center-to-Center



<p>DOOR THICKNESS 1 5/8" - 1 3/4" 1 7/8" - 2 1/4" 2 3/8" - 2 3/4" 2 7/8" - 3 1/4"</p>	<p>KEYED CY4-ERSGL25 CY4-ERSGL32 CY4-ERSGL35 CY4-ERSGL4</p>	
<p>DOOR THICKNESS 1 5/8" - 1 7/8" 2" - 2 3/8" 2 1/2" - 2 3/4" 2 7/8" - 3 1/4"</p>	<p>NON-KEYED CY4-ERHLF16TT CY4-ERHLF19TT CY4-ERHLF21TT CY4-ERHLF23TT</p>	

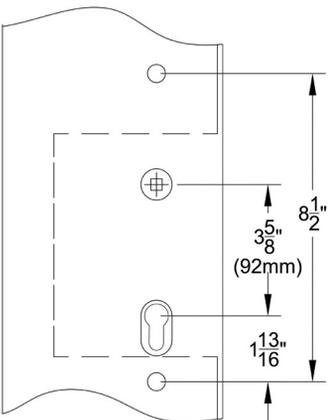

Keyed Plates with Euro Profile Cylinder

Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2"	Extended Door Thickness: Over 2" to 2 3/4"	Extended Door Thickness: Over 2 3/4" to 3 1/4"
<ul style="list-style-type: none"> • 2 5/8" Euro profile cylinder • 3 3/4" Steel spindle • 1 1/2" Rosette screws 	<ul style="list-style-type: none"> • 3 5/8" Euro profile cylinder • 3 3/4" Steel spindle • 2" Rosette screws 	<ul style="list-style-type: none"> • 3 5/8" Euro profile cylinder for 2 1/8" - 2 1/4" thick door • 3 7/8" Euro profile cylinder for 2 3/8" - 2 3/4" thick door • 4 1/2" Steel spindle • 2" Rosette screws for 2 1/8" - 2 1/4" thick door • 2 1/2" Rosette screws for 2 3/8" - 2 3/4" thick door 	<ul style="list-style-type: none"> • 4" Euro profile cylinder • 5" Steel spindle • 3" Rosette screws

Non-Keyed Plates Includes non-keyed passage, fixed handle out/operating handle in, and dummy (uses screws only)

Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2"	Extended Door Thickness: Over 2" to 2 3/4"	Extended Door Thickness: Over 2 3/4" to 3 1/4"
<ul style="list-style-type: none"> • 1 21/32" Euro profile cylinder • 3 3/4" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 1 1/2" Rosette screws 	<ul style="list-style-type: none"> • 3 3/4" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 2" Rosette screws 	<ul style="list-style-type: none"> • 4 1/2" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 2" Rosette screws for 2 1/8" - 2 1/4" thick door • 2 1/2" Rosette screws for 2 3/8" - 2 3/4" thick door 	<ul style="list-style-type: none"> • 5" Steel spindle • 2 1/2" Half spindle for fixed handle out/operating handle in • 3" Rosette screws

Charge for Re-Keying - \$3 (NET) per cylinder

- Keying to Code
 - Order by indicating "Key Code XXXX" next to applicable locks
- Keying Alike
 - Order by indicating "Keyed Alike" next to applicable locks if only one keyed alike group is wanted
 - If ordering multiple groups (houses) indicate "Keyed Alike House #_" next to applicable locks

Set includes plates, handles and cylinders (where applicable). Multi Point lock mechanism is not included.
 Crestline®, Hoppe®, Hurd®, KfV®, Kolbe & Kolbe®, Lincoln®, Loewen®, Oknoplast®, Paddock Lockmaster™
 Peachtree®, Semco®Sierra Pacific®, Signature®, Simpson®, Therma-Tru®, Vetter®, Willmar®, Windsor®, Weathershield®

Keyed with Euro Profile Cylinder (for Active Door, Schlage® Keyway Standard, Rekeyable)

Product Codes **1511, 1531, 1551, 1571, 15A1**

Plates, Product Codes **1521, 1541, 1561, 1581, 15B1**

Non-Keyed, Passage (for Semi-Active Door)

Product Codes **1512, 1532, 1552, 1572, 15A2**

Product Codes **1522, 1542, 1562, 1582, 15B2**

Non-Keyed, Euro Profile Style Thumbturn Inside (for Active Door)

Product Codes **1513, 1533, 1553, 1573, 15A3**

Product Codes **1523, 1543, 1563, 1583, 15B3**

Non-Keyed, Fixed Handle Outside, Operating Handle Inside (for Semi-Active Door)

Product Codes **1514, 1534, 1554, 1574, 15A4**

Fixed

Product Codes **1524, 1544, 1564, 1584, 15B4**

Fixed

Dummy Pair (for Non-Active Door)

Product Codes **1515, 1535, 1555, 1575, 15A5**

Fixed



Fixed

Product Codes **1525, 1545, 1565, 1585, 15B5**

Fixed

Fixed

Door Configuration #6 American Cylinder Below Handle 3 5/8" Center-to-Center

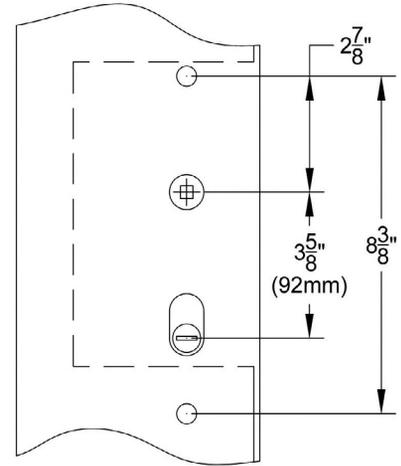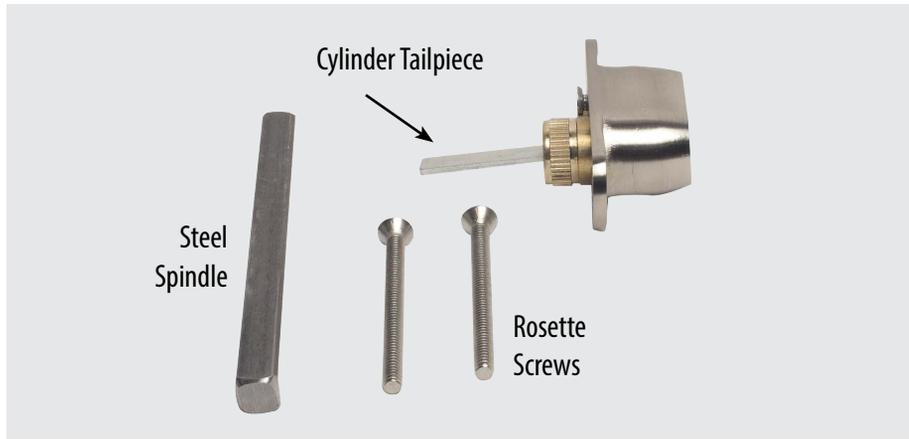

Keyed Plates with American Cylinder Includes non-keyed thumbturn inside

Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2"	Extended Door Thickness: Over 2" to 2 3/4"	Extended Door Thickness: Over 2 3/4" to 3 1/4"
<ul style="list-style-type: none"> • Single cylinder tailpiece • 3 3/4" Steel spindle • 1 1/2" Rosette screws 	<ul style="list-style-type: none"> • Long single cylinder tailpiece • 3 3/4" Steel spindle • 1 1/2" Rosette screws 	<ul style="list-style-type: none"> • Long single cylinder tailpiece for 2 1/8" - 2 1/2" thick door • Extra long single cylinder tailpiece for 2 3/8" - 2 3/4" thick door • 4 1/2" Steel spindle • 2" Rosette screws for 2 1/8" - 2 1/4" thick door • 2 1/2" Rosette screws for 2 3/8" - 2 3/4" thick door 	<ul style="list-style-type: none"> • Extra long single cylinder tailpiece • 5" Steel spindle • 3" Rosette screws

Non-Keyed Plates Includes non-keyed passage, fixed handle out/operating handle in, and dummy (uses screws only)


Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2"	Extended Door Thickness: Over 2" to 2 3/4"	Extended Door Thickness: Over 2 3/4" to 3 1/4"
<ul style="list-style-type: none"> • Thumbturn tailpiece • 3 3/4" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 1 1/2" Rosette screws 	<ul style="list-style-type: none"> • Thumbturn tailpiece • 3 3/4" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 2" Rosette screws 	<ul style="list-style-type: none"> • Long Thumbturn tailpiece for 2 1/8" - 2 1/2" thick door • Extra long thumbturn tailpiece for 2 3/8" - 2 3/4" thick door • 4 1/2" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 2" Rosette screws for 2 1/8" - 2 1/4" thick door • 2 1/2" Rosette screws for 2 3/8" - 2 3/4" thick door 	<ul style="list-style-type: none"> • Extra long thumbturn tailpiece • 5" Steel spindle • 2 1/2" Half spindle for fixed handle out/operating handle in • 3" Rosette screws

Charge for Re-Keying - \$3 (NET) per cylinder


- Keying to Code
 - Order by indicating "Key Code XXXXX" next to applicable locks
- Keying Alike
 - Order by indicating "Keyed Alike" next to applicable locks if only one keyed alike group is wanted
 - If ordering multiple groups (houses) indicate "Keyed Alike House #_" next to applicable locks

Charge for Construction Keying - \$4 (NET) per cylinder

- Locks that are both construction keyed and keyed alike in a house group will be charged a total of \$7 (NET) per cylinder
- Lost ball system
- Last four pin locations drilled for lost ball application
- Master key pins used for code variability
- Construction keys and owner keys sent separately
- Order by indicating "Construction Keyed, House #_" next to applicable locks



Construction devices used on one or more of last four positions





Dimples drilled in plug in this position

Set includes plates, handles and cylinders (where applicable). Multi Point lock mechanism is not included.
Milgard®, Pella®

Keyed with American Cylinder (for Active Door, Schlage® Keyway Standard, Weiser® Keyway Optional, Rekeyable)	
Product Codes 1611, 1631, 1651, 1671, 16A1 	Product Codes 1621, 1641, 1661, 1681, 16B1
Non-Keyed, Passage (for Semi-Active Door)	
Product Codes 1612, 1632, 1652, 1672, 16A2 	Product Codes 1622, 1642, 1662, 1682, 16B2
Non-Keyed, American Style Thumbturn Inside (for Active Door)	
Product Codes 1613, 1633, 1653, 1673, 16A3 	Product Codes 1623, 1643, 1663, 1683, 16B3
Non-Keyed, Fixed Handle Outside, Operating Handle Inside (for Semi-Active Door)	
Product Codes 1614, 1634, 1654, 1674, 16A4 Fixed 	Product Codes 1624, 1644, 1664, 1684, 16B4 Fixed
Dummy Pair (for Non-Active Door)	
Product Codes 1615, 1635, 1655, 1675, 16A5 Fixed Fixed 	Product Codes 1625, 1645, 1665, 1685, 16B5 Fixed Fixed

Door Configuration #7 American Cylinder Above Handle 6" Center-to-Center

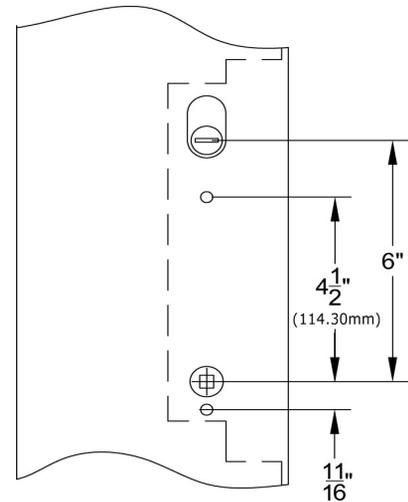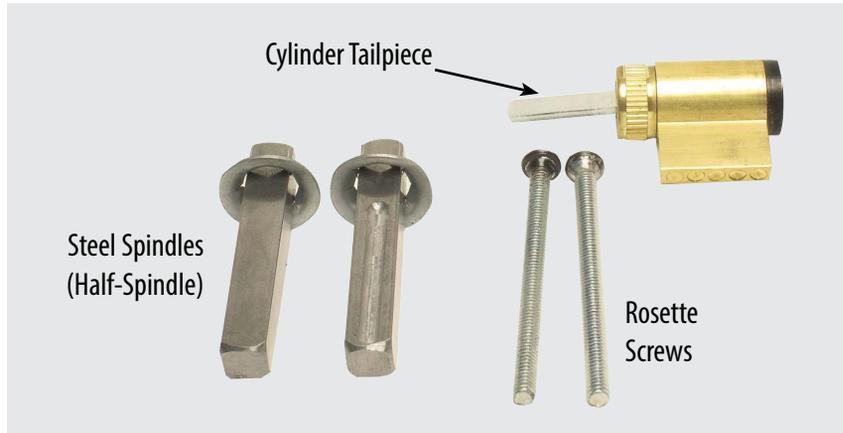

Keyed Plates with American Cylinder Includes non-keyed thumbturn inside


Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2 3/8"	Extended Door Thickness: Over 2 3/8" to 2 7/8"
<ul style="list-style-type: none"> • Single cylinder tailpiece • 2" Steel spindles (half-spindle) • 2" Rosette screws 	<ul style="list-style-type: none"> • Long single cylinder tailpiece for 1 7/8" - 2 1/2" thick door • Extra long single cylinder tailpiece for 2 5/8" thick door • 2" Steel spindles (half-spindle) • 2" Rosette screws for 1 7/8" thick door • 2 1/2" Rosette screws for 2" - 2 3/8" thick door • 3" Rosette screws for 2 1/2" - 2 5/8" thick door 	<ul style="list-style-type: none"> • Extra long single cylinder tailpiece • 2 1/2" Steel spindles (half-spindle) • 3" Rosette screws for 2 3/4" - 2 7/8" thick door • 3 1/2" Rosette screws for 3" - 3 1/4" thick door

Non-Keyed Plates Includes non-keyed passage, fixed handle out/operating handle in, & dummy (uses screws only)


Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2 3/8"	Extended Door Thickness: Over 2 3/8" to 2 7/8"
<ul style="list-style-type: none"> • Thumbturn tailpiece • 2" Steel spindles (half-spindle) • 2" Rosette screws 	<ul style="list-style-type: none"> • Long thumbturn tailpiece for 1 7/8" - 2 1/2" thick door • Extra long thumbturn tailpiece for 2 5/8" thick door • 2" Steel spindles (half-spindle) • 2" Rosette screws for 1 7/8" thick door • 2 1/2" Rosette screws for 2" - 2 3/8" thick door • 3" Rosette screws for 2 1/2" - 2 5/8" thick door 	<ul style="list-style-type: none"> • Extra long single cylinder tailpiece • 2 1/2" Steel spindles (half-spindle) • 3" Rosette screws for 2 3/4" - 2 7/8" thick door • 3 1/2" Rosette screws for 3" - 3 1/4" thick door

Charge for Re-Keying - \$3 (NET) per cylinder
<ul style="list-style-type: none"> • Keying to Code <ul style="list-style-type: none"> - Order by indicating "Key Code XXXXX" next to applicable locks • Keying Alike <ul style="list-style-type: none"> - Order by indicating "Keyed Alike" next to applicable locks if only one keyed alike group is wanted - If ordering multiple groups (houses) indicate "Keyed Alike House #_" next to applicable locks

Charge for Construction Keying - \$4 (NET) per cylinder
<ul style="list-style-type: none"> • Locks that are both construction keyed and keyed alike in a house group will be charged a total of \$7 (NET) per cylinder • Lost ball system • Last four pin locations drilled for lost ball application • Master key pins used for code variability • Construction keys and owner keys sent separately • Order by indicating "Construction Keyed, House #_" next to applicable locks



Construction devices used on one or more of last four positions



Dimples drilled in plug in this position


DOOR CONFIGURATION #7 Specification Sheet for Components and Door Thickness

Set includes plates, handles and cylinders (where applicable). Multi Point lock mechanism is not included.

Trillanium® (formerly W&F Manufacturing)


Keyed with American Cylinder (for Active Door, Schlage® Keyway Standard, Weiser® Keyway Optional, Rekeyable)

Product Codes 1721, 1741, 1761, 17B1

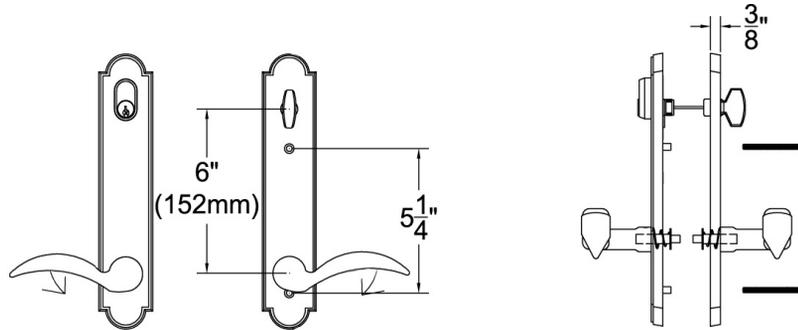


Non-Keyed, American Style Thumbturn Inside (Active Door)

Product Codes 1723, 1743, 1763, 17B3

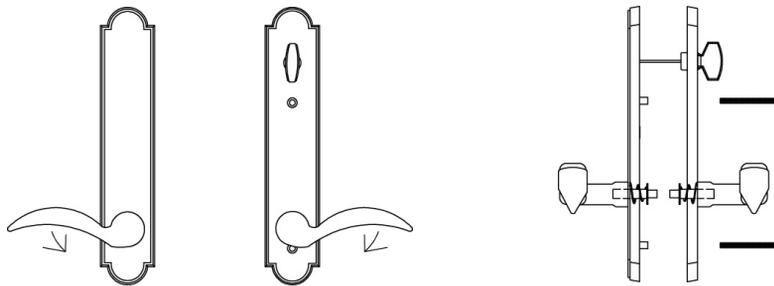


Dummy Pair (for Non-Active Door)

Product Codes 1725, 1745, 1765, 17B5


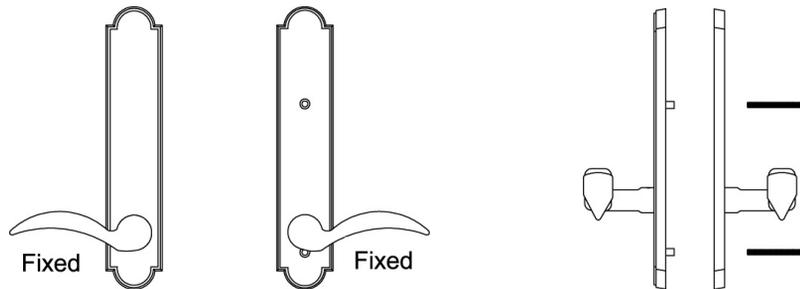


Non-Keyed, Fixed Handles, American Style Thumbturn Inside (for Semi-Active Door)

Product Codes 1726, 1746, 1766, 17B6

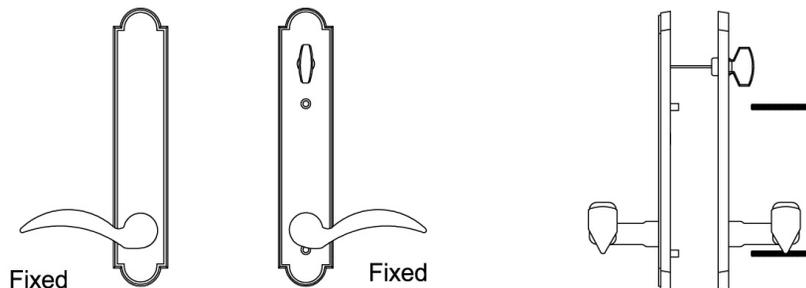

Door Configuration #8 American Cylinder Above Handle 5 1/4" Center-to-Center

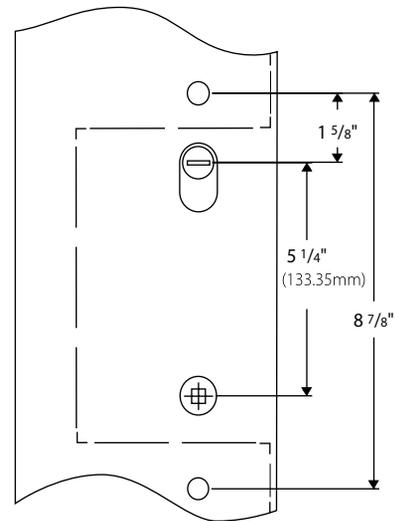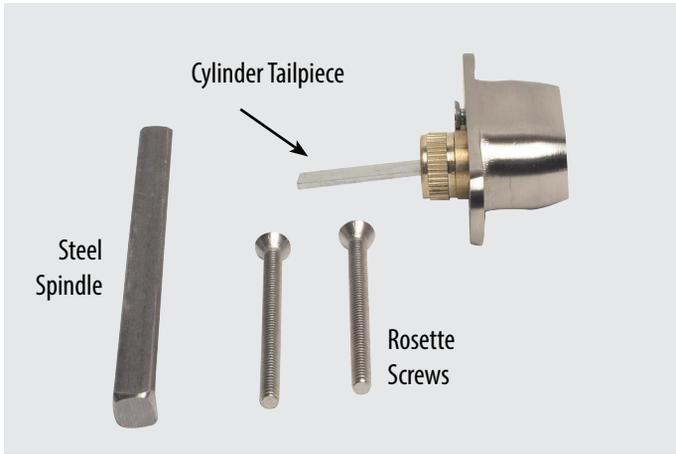

Keyed Plates with American Cylinder Includes non-keyed thumbturn inside

Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2"	Extended Door Thickness: Over 2" to 2 3/4"	Extended Door Thickness: Over 2 3/4" to 3 1/4"
<ul style="list-style-type: none"> • Single cylinder tailpiece • 3 3/4" Steel spindle • 2" Rosette screws 	<ul style="list-style-type: none"> • Long single cylinder tailpiece • 3 3/4" Steel spindle • 2" Rosette screws for 1 7/8" thick door • 2 1/2" Rosette screws for 2" thick door 	<ul style="list-style-type: none"> • Long single cylinder tailpiece for 2 1/8" - 2 1/2" thick door • Extra long single cylinder tailpiece for 2 3/8" - 2 3/4" thick door • 4 1/2" Steel spindle • 2 1/2" Rosette screws for 2 1/8" - 2 3/8" thick door • 3" Rosette screws for 2 1/2" - 2 3/4" thick door 	<ul style="list-style-type: none"> • Extra long single cylinder tailpiece • 5" Steel spindle • 3" Rosette screws for 2 7/8" thick door • 3 1/2" Rosette screws for 3" - 3 1/4" thick door

Non-Keyed Plates Includes non-keyed passage, fixed handle out/operating handle in, and dummy (uses screws only)


Standard Door Thickness: from 1 5/8" to 1 3/4"	Extended Door Thickness: Over 1 3/4" to 2"	Extended Door Thickness: Over 2" to 2 3/4"	Extended Door Thickness: Over 2 3/4" to 3 1/4"
<ul style="list-style-type: none"> • Thumbturn tailpiece • 3 3/4" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 1 1/2" Rosette screws 	<ul style="list-style-type: none"> • Thumbturn tailpiece • 3 3/4" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 2" Rosette screws 	<ul style="list-style-type: none"> • Long Thumbturn tailpiece for 2 1/8" - 2 1/2" thick door • Extra long thumbturn tailpiece for 2 3/8" - 2 3/4" thick door • 4 1/2" Steel spindle • 2" Half spindle for fixed handle out/operating handle in • 2" Rosette screws for 2 1/8" - 2 3/8" thick door • 2 1/2" Rosette screws for 2 1/2" - 2 3/4" thick door 	<ul style="list-style-type: none"> • Extra long thumbturn tailpiece • 5" Steel spindle • 2 1/2" Half spindle for fixed handle out/operating handle in • 3" Rosette screws

Charge for Re-Keying - \$3 (NET) per cylinder


- Keying to Code
 - Order by indicating "**Key Code XXXXX**" next to applicable locks
- Keying Alike
 - Order by indicating "**Keyed Alike**" next to applicable locks if only one keyed alike group is wanted
 - If ordering multiple groups (houses) indicate "**Keyed Alike House #_**" next to applicable locks

Charge for Construction Keying - \$4 (NET) per cylinder

- Locks that are both construction keyed and keyed alike in a house group will be charged a total of **\$7 (NET) per cylinder**
- Lost ball system
- Last four pin locations drilled for lost ball application
- Master key pins used for code variability
- Construction keys and owner keys sent separately
- Order by indicating "**Construction Keyed, House #_**" next to applicable locks



Construction devices used on one or more of last four positions




Dimples drilled in plug in this position

Set includes plates, handles and cylinders (where applicable). Multi Point lock mechanism is not included.


Neuma Doors®

Keyed with American Cylinder (for Active Door, Schlage® Keyway Standard, Weiser® Keyway Optional, Rekeyable)

Product Codes **1811, 1831, 1851, 18A1**

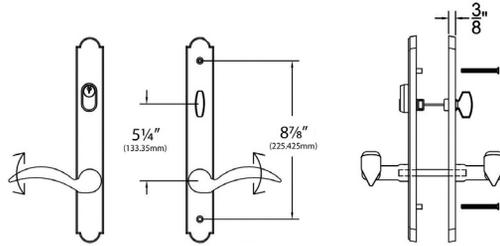


Product Codes **1821, 1841, 1861, 18B1**

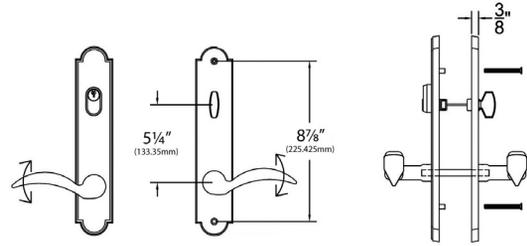


Non-Keyed, Passage (for Semi-Active Door)

Product Codes **1812, 1832, 1852, 18A2**

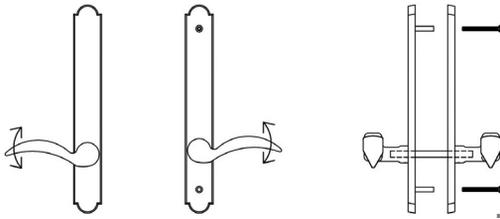


Product Codes **1822, 1842, 1862, 18B2**

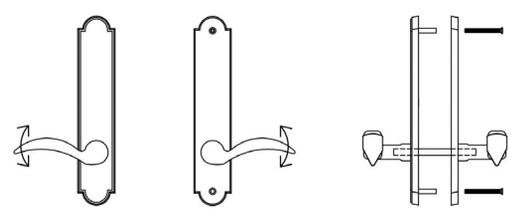


Non-Keyed, American Style Thumbturn Inside (for Active Door)

Product Codes **1813, 1833, 1853, 18A3**

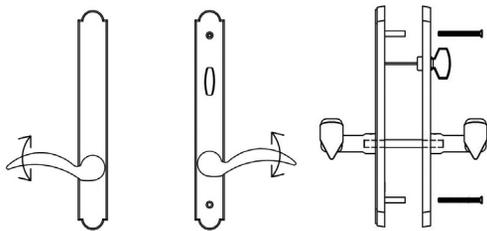


Product Codes **1823, 1843, 1863, 18B3**

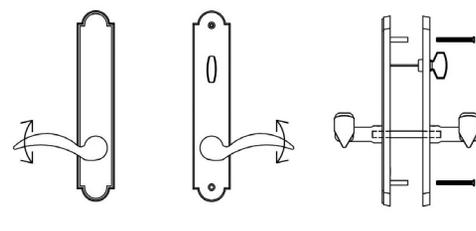

Non-Keyed, Fixed Handle Outside, Operating Handle Inside (for Semi-Active Door)

Product Codes **1814, 1834, 1854, 18A4**

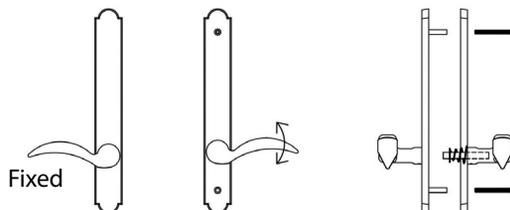

Product Codes **1824, 1844, 1864, 18B4**

